

ISO9001 IEC62471 IEC61547 IEC61000 IEC 62560 60598



Indoor & Outdoor Light



SHAOXING CHANTY LIGHTING CO.,LTD.

Shengfeng New Town, Baiguan street, Shangyu District,
Shaoxing City, Zhejiang Province, China.

+86-575 85749268

+86-15167566359

kevin@yleds.com

www.okaybright.com



Indoor & Outdoor Light



ABOUT CHANTY LIGHTING

Chanty lighting is focused on selling led bulbs, led ceiling lamps, led linear lamps, led floodlights, led downlights, led bulkhead lights.

We are 1.5 hour from Shanghai and one hour from Ningbo by car. Based on the strategy of high quality products with competitive price, customer first sales team, strict quality control system, needed certificate and advanced suppliers management, our export volume has been increasing year by year.

Our products are highly spoken by the clients due to our high-quality and good-performance products. we are now already selling more than 200 millionspcs lamps to about 30 countries and areas in the world.





C37
Power:1.6/2.9/3.5/4.5/5.5/
6.5/7.5/8.5/10W
Input:220~240V
CRI:>80/90/97
PF:≥0.5
Base:E14/E27/B15/B22



C37
Power:1.6/2.9/3.5/4.5/5.5/
6.5/7.5/8.5/10W
Input:220~240V
CRI:>80/90/97
PF:≥0.5
Base:E14/E27/B15/B22



CF37
Power:1.6/2.9/3.5/4.5/5.5/
6.5/7.5/8.5/10W
Input:220~240V
CRI:>80/90/97
PF:≥0.5
Base:E14/E27/B15/B22



T37
Power:8W
Input:220~240V
CRI:>80
PF:≥0.5
Base:E14/E27/B15/B22



T37
Power:8W
Input:220~240V
CRI:>80
PF:≥0.5
Base:E14/E27/B15/B22



P45/G45
Power:1.6/2.9/3.5/4.5/5.5/
6.5/7.5/8.5/10W
Input:220~240V
CRI:>80/90/97
PF:≥0.5
Base:E14/E27/B15/B22



P45/G45
Power:1.6/2.9/3.5/4.5/5.5/
6.5/7.5/8.5/10W
Input:220~240V
CRI:>80/90/97
PF:≥0.5
Base:E27



A55
Power:2.9/4.5/5/7W
Input:220~240V
CRI:>80/90/97
PF:≥0.5
Base:E27/B22



A60
Power:5/7/9/9.5/11/13/15/17W
Input:220~240V
CRI:>80/90/97
PF:≥0.5
Base:E27/B22



A65
Power:15/17/18/20W
Input:220~240V
CRI:>80/90/97
PF:≥0.5
Base:E27/B22

2500
LM



A70
Power:15W
Input:220~240V
CRI:>80/90/97
PF:≥0.5
Base:E27/B22



A80
Power:18W
Input:220~240V
CRI:>80/90/97
PF:≥0.5
Base:E27/B22



GU5.3
Power:3.5/4.5/5.5/6.5W
CRI:>80/90/97
PF:≥0.5
Input:220~240V
Base:GU5.3



GU5.3
Power:3.5/4.5/5.5/6.5/7.5/8/9W
CRI:>80/90/97
PF:≥0.5
Input:220~240V
Base:GU5.3



GU5.3
Power:3W/4W/5W
CRI:>80/90/97
PF:≥0.5
Input:220~240V
Base:GU5.3



GU10
Power:3.5/4.5/5.5/6.5/8.5W
CRI:>80/90/97
PF:≥0.5
Input:220~240V
Base:GU10



GU10
Power:3.5/4.5/5.5/6.5/7.5/8/9W
CRI:>80/90/97
PF:≥0.5
Input:220~240V
Base:GU10



GU10
Power:4W/6.5W
CRI:>80/90/97
PF:≥0.5
Input:220~240V
Base:GU10

CLASS
B



GU10 LUPO
Power:5W/7W
CRI:>80
PF:≥0.5
Input:220~240V
Base:GU10



GU10-MR11
Power:2W
CRI:>80
PF:≥0.4
Input:220~240V
Base:GU10




MR11
Power:4W/5W/6.5W
CRI:>80/90/97
PF:≥0.5
Input:220~240V
Base:E14



E14 MINI
Power:2.7W
CRI:>80
PF:≥0.4
Input:220~240V
Base:E14



G9-1
Power:4W
CRI:>80
PF:≥0.4
Input:220~240V
Base:G9



G4
Power:1.5W
CRI:>80/90/97
Input:12V
Base:G4





R39

Power:3.7/5W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E14



R50

Power:4.2/4.8/7W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E14



R63

Power:7/8.5/9W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



R80

Power:8.5/9.5/13W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



R90

Power:8.5/9.5/15W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



PAR20

Power:7W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



PAR30

Power:11W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



PAR38

Power:14W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



PAR38 colors

Power:14W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



AR111

Power:12/15W
CRI:>80
PF:≥0.5
Input:100-130V
Base:GU10/AR111



T100/120/140/160

Power:200W
CRI:>80
PF:≥0.5/0.9
Input:100-240V
Base:E27/E40



T170/190/230

Power:200W
CRI:>80
PF:≥0.5/0.9
Input:100-240V
Base:E27/E40



T60

Power:10W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



T70

Power:15W
CRI:>80
PF:≥0.5/0.9
Input:220-240V
Base:E27



T80

Power:18/20/22W
CRI:>80
PF:≥0.5/0.9
Input:220-240V
Base:E27/E26/B22/E40



T100

Power:25/30/32W
CRI:>80
PF:≥0.5/0.9
Input:220-240V
Base:E27/E26/B22/E40



T120

Power:36/40/42W
CRI:>80
PF:≥0.5/0.9
Input:220-240V
Base:E27/E26/B22/E40



T140

Power:48/50W
CRI:>80
PF:≥0.5/0.9
Input:220-240V
Base:E27/E26/B22/E40



T160

Power:60W
CRI:>80
PF:≥0.5/0.9
Input:220-240V
Base:E27/E26/B22/E40



F150/200/250

Power:16/24/36W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



G95/120

Power:15/19/22/23.5W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



F110/130/150

F170/190/220

Power:20/30/40/50/70/100W
CRI:>80
PF:≥0.5/0.9
Input:220-240V
Base:E27



F110/130/150

F170/190/220

Power:20/30/40/50/70/100W
CRI:>80
PF:≥0.5/0.9
Input:220-240V
Base:E27



E60/70/80/90

Power:2/5/7/9/12W
CRI:>80
PF:≥0.5
Input:220-240V
Base:E27



LED BULB

NIGHT LIGHT



B35
Power:2/4W
Input:220~240V
CRI:>80
PF:≥0.5
Base:E12/E14



C37
Power:2/4W
Input:220~240V
CRI:>80
PF:≥0.5
Base:E12/E14



P45
Power:2/4W
Input:220~240V
CRI:>80
PF:≥0.5
Base:E12/E14



P45
Power:2/4W
Input:220~240V
CRI:>80
PF:≥0.5
Base:E26 /E27/B22



A60/70
Power:5/6/8/10W
Input:220~240V
CRI:>80
PF:≥0.5
Base:E26 /E27/B22



G80 / 95 / 120
Power:6/8/10W
CRI:>80
PF:≥0.5
Input:220~240V
Base:E27/E26EB22



T26/32
Power:2/4/5W
Input:220~240V
CRI:>80
PF:≥0.5
Base:E12/E14



ST26/48/58/64
Power:6/8/10W
CRI:>80
PF:≥0.5
Input:220~240V
Base:E14/E27/EB22



T26
Power:2W
CRI:>80/90/97
PF:≥0.4
Input:220~240V
Base:E14



GX53-1
Power:5/7/8/9W
CRI:>80
PF:≥0.5
Input:220~240V
Dimension: 74x26mm
Base:GX53



GX53-2
Power:10/12/14W
CRI:>80
PF:≥0.5
Input:220~240V
Dimension: 74x28mm
Base:GX53



T053-3CCT
Power:1W
Capacity:1100mAh
Luminance:70lm
Working:9H
Charge:3H



T066
Power:0.5W
Capacity:500mAh
Luminance:40lm
Working:5H
Charge:1.5H



T081
Power:1/1.5/2/2.5W
Capacity:1000~2200mAh
Luminance:75~210lm
Working:7~9H
Charge:1.5~3H



T093
Power:1.5/1.85W
Capacity:4000mAh
Luminance:100lm
Working:12~18H
Charge:4.5H



T054
Power:1/1.5/2/2.5W
Capacity:1000~2200mAh
Luminance:75~210lm
Working:7~9H
Charge:1.5~3H



T067
Power:0.5W
Capacity:400mAh
Luminance:15lm
Charge:2H



T087
Power:1W
Capacity:1000mAh
Luminance:70lm
Working:5H
Charge:1.5H



T109
Power:1W
Capacity:500/1000mAh
Luminance:75lm
Working:5H
Charge:1.5H



T055
Power: 0.45W
Capacity:600mAh
Luminance:40lm
Working:5H
Charge:1.5H



T069
Power:1.5W
Capacity:1800mAh
Luminance:150lm
Working:8H
Charge:2.5H



T088
Power:1/1.5/2/2.5W
Capacity:1100~2200mAh
Luminance:80~200lm
Working:7~9H
Charge:1.5~3H



T119
Power:1W
Capacity:1100mAh
Luminance:90lm
Working:9H
Charge:2H



FLOOD LIGHT

HIGH BAY LIGHT

CE FCC CB ENEC

RoHS Compliant

EMC 2.0

ERP NEW



2/3 warranty

85 lm/w

IP65

CRI ≥70/80

IK08

Beam angle 90°

SMD

-20℃ +40℃

50000h

PF >0.9

Multiple color options

RAL 9003

RAL 7004

RAL 7037

RAL 9005

Functions:

- Built-in breathing value
- CCT selectable
- Power selectable(50%/75%/100%)--100W/200W

Power	30/50/100/150/200W	Power	Dimension
Voltage	100–265V/220–240V	30W	164x139x34mm
Efficiency	85lm/w	50W	183x169x34mm
CCT	3000K/4000K/6500K	100W	253x242x41mm
Material	Aluminum+PC Lens	150W	328x265x33mm
		200W	402x349x44mm

CE FCC CB ENEC

RoHS Compliant

EMC 2.0

ERP NEW



5 warranty

185 lm/w

IP65

CRI ≥70/80

IK08

Beam angle 90°

SMD

-20℃ +40℃

50000h

PF >0.9

Multiple color options

RAL 9003



RAL 9005

Power	100/150/200/240/320W	Power	Dimension
Voltage	185–265V/100–265V	100W	Φ 238x92mm
Efficiency	135/160/185lm/w	150W	Φ 280x92mm
CCT	4000K/5000K/6500K	200/240W	Φ 319x101mm
Cable	37cm H05RN-F 3G*1.0mm²	320W	Φ 362x92mm
Surge	1KV/2KV,2KV/4KV ,6KV/6KV can add 10KV external surge protector		
Material	Aluminum+ PC Lens		

CEILING LIGHTS



CI01 Serie					
Power	12/18/24/36W	Power	Dimension	Power	Dimension
Voltage	100–265V/185–265V	12W –S	247x247x32m m	12W –R	Φ250x32mm
Lumen	85/105/110lm/w	18W –S	292x292x32m m	18W –R	Φ292x32mm
CTT	3000/ 4000K/6500K	24W –S	350x350x32m m	24W –R	Φ350x32mm
Material	PP+PC	36W –S	418x418x32m m	36W –R	Φ418x32mm

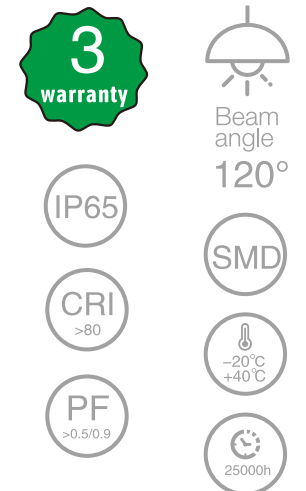

CI02 Serie									
Power	12/18/24/36/60W	Power	Lumen	PF	Dimension	Power	Lumen	PF	Dimension
Voltage	AC 220–240V	12W–S	1200lm	0.5	270x270x60m m	12W–R	1200lm	0.5/0.7	Φ360x55mm
ERP	F	18W–S	1830lm	0.5	270x270x60m m 330x330x65m m	18W–R	1830lm	0.5/0.7	Φ310x55mm Φ330x55mm
CTT	3000/4000K/6500K	24W–S	2500lm	0.5	380x380x65m m	24W–R	2500lm	0.5/0.7	Φ350x55mm Φ380x65mm
Material	PMMA+Iron/PP+Iron	36W–S	3820lm	0.9	380x380x65m m 480x480x65m m	36W–R	3820lm	0.9	Φ380x65mm Φ500x80mm
Terminal	Quick-connect terminal					60W–R	6500lm	0.9	Φ500x80mm

CEILING LIGHTS



3
warranty

IP
20/44

CRI
≥80

PF
>0.5/0.9



Beam
angle
120°

SMD

-20°C
+40°C

25000h



Microwave Sensor

Model Options:

1. On/off

2. Switch Dim /Tone

3. Microwave

4. RGB+CCT &IR remote control
5. CCT & IR remote control

6. Wifi RGB + CCT

7. Wifi CCT

8. Toggle CCT

Cl03 Serie										
Power	12/18/24/36/ 48/60W	Power	Lumen	PF	Dimension	Power	Lumen	PF	Dimension	
Voltage	AC 220~240V	12W -S	1200lm	0.5	250x250x65m m	12W -R	1200lm	0.5	Φ250x63mm	
Lumen	110lm/w	18W -S	1830lm	0.5	295x295x65m m	18W -R	1830lm	0.5	Φ295x60mm	
CTT	3000/4000K/6500K	24W -S	2500lm	0.5	295x295x65m m	24W -R	2500lm	0.5	Φ350x61mm	
Material	PC	36W -S	3820lm	0.9	420x420x65m m	36W -R	3820lm	0.9	Φ350x61mm Φ420x65mm	
		48W -S	5160lm	0.9	420x420x65m m	48W -R	5160lm	0.9	Φ420x65mm	
						60W -R	6500lm	0.9	Φ420x65mm	

CEILING LIGHTS



CL04



CL05



CL06



CL07



CL08



CL09



CL10



CL11



CL12



CL13



CL14



CL15

PANEL LIGHT



3
warranty

IP20

CRI
≥80

PF
>0.5/0.9




Beam
angle
120°

SMD

-20°C
+40°C

25000h

Diagram:

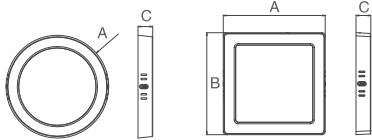

3000-4000-6500

Surface Mounted							
Power	6/12/18/24W	Power	Lumen	Dimension	Power	Lumen	Dimension
Voltage	100-265V/220-240V	6W-S	660lm	121x121x31mm	6W-R	660lm	Φ121x31mm
Efficiency	110lm/w	12W-S	1320lm	167x167x31mm	12W-R	1320lm	Φ167x31mm
CTT	3000/4000K/6500K	18W-S	1980lm	216x216x31mm	18W-R	1980lm	Φ217x31mm
Material	PP+PC	24W-S	2640lm	285x285x31mm	24W-R	2640lm	Φ290x31mm
Function	CCT Switch						

PANEL LIGHT



3
warranty

IP20

CRI
≥80

PF
>0.7/0.9

IK08




Beam
angle
120°

SMD

-20°C
+40°C

25000h



size:595X595mm

BIG PANEL	
Power	36/40/48/60W
Voltage	100-265V/185-265V
Efficiency	100m/w
CCT	3000/4000K/6500K
Material	ABS+Iron

BULKHEAD LIGHT



3
warranty

IP65

CRI
≥80

PF
>0.5

Beam
angle
120°

SMD


-20°C
+40°C

25000h

Features:

- PIR with light sensor
- Motion detection: 3–15m
- Daylight sensor: 30lux/80lux
- Hold time: 10sec/30sec/3mins/5mins

Diagram:

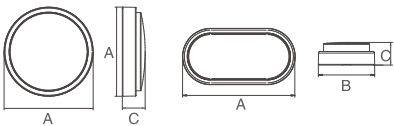

Power	8W/14W–R	8W/14W–O	Power	Function	Dimension
Voltage	AC 220–240V	AC 220–240V	8W/14W–R	On/Off	Φ 194x55mm
Efficiency	80lm/w	80lm/w	8W–R PIR	PIR with light sensor	Φ 194x60mm
CTT	3000/4000K/6500K	3000/4000K/6500K	8W/14W–O	On/Off	214x110x48mm
Color	Black / White	Black / White	8W–O PIR	PIR with light sensor	214x110x57mm
Material	ABS+PC	ABS+PC			

LED T8 PC/GLASS TUBE



3
warranty

160
lm/w

IP20

CRI
≥80


Beam
angle
120°

SMD

-20°C
+40°C

25000h

Diagram:



T8 Serise				
Power	5.5/7.5/9/11.5/13/14/15/18/20/23/24W	Power	PF	Dimension
Voltage	AC 220–240V	T8–0.6M	0.5	Φ 25x600mm
Efficiency	85/90/100/110/160lm/w	T8–0.9M	0.7	Φ 25x900mm
ERP	N/Y	T8–1.2M	0.7	Φ 25x1200mm
CTT	3000/4000K/6500K	T8–1.5M	0.7	Φ 25x1500mm
Material	PMMA+PC / GLASS+PC			
Terminal	Single ended / Double ended			

LED T5 LINKABLE

LED BATTEN LIGHT



3
warranty

IP20

CRI
≥80

PF
>0.5

Beam
angle
130°

SMD

-20°C
+40°C

25000h



2
warranty

100
lm/w

IP20

CRI
>80

Beam
angle
120°

SMD

-20°C
+40°C

25000h

3000–4000–6500

Model Options:

Linkable: Extendable design, could connect up to 8–10 tube lights together with seamless connectors;

Wide Application: This 2 foot LED light is perfect for various lighting needs. It is ideal for daily lighting and applications in garages, workshops, basements, warehouses, workbenches, homes, barns, offices, attics, storage rooms, exhibition areas etc., any indoor lighting.

Diagram:



T5 Serise					
Power	4/8/14/16/18W	Power	Lumen	PF	Dimension
Voltage	AC 175–240V	4W	340lm	0.5	280x24x33mm
Efficiency	85lm/w	8W	680lm	0.5	555x24x33mm
CTT	3000/4000K/6500K	14W	1260lm	0.5	855x24x33mm
Material	PVC/PC	16W	1440lm	0.5	995x24x33mm
		18W	1620lm	0.5	1155x24x33mm



BL Serise				
Power	36/50/80/95/110W	Power	PF	Dimension
Voltage	AC 185–265V	36W	0.5	1200x62x25mm
Efficiency	100lm/w	50W	0.5	1200x62x25mm
CCT	3000/4000K/6500K	80W	0.5	1200x75x25mm
Cable	25cm H05RN–F 3G*1.0mm	95W	0.5	1200x95x25mm
Surge	0.5KV/1KV	110W	0.5	1200x100x25mm
Material	PP+PC			
Function	Switch CCT			

TRI-PROOF LIGHT

STREET LIGHT



3
warranty

IP65

CRI
≥80

PF
>0.7/0.9

IK08

Beam
angle
120°


SMD

-20°C
+40°C

30000h



Diagram:

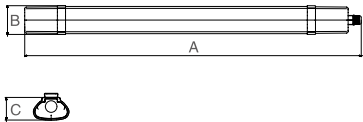

TP01 Serise				
Power	18/36/48W	Power	PF	Dimension
Voltage	100-265V/185-265V	18W	0.7	618.5x52.8x33.8mm
Efficiency	120lm/w	36W	0.9	1218.5x52.8x33.8mm
CCT	3000/4000K/6500K	48W	0.9	1518.5x52.8x33.8mm
Material	PC			



3
warranty

IP66

CRI
≥70/80

PF
>0.92

IK08

Beam
angle
120°

SMD

-20°C
+40°C

25000h



Multiple color options





Diagram:



LK Serise			
Power	50/70/100/120/150/200W	Power	Dimension
Voltage	220-240V/100-265V	50/70W	409x149x74m m
Efficiency	110lm/w	100W	493x184x74m m
CCT	4000K/5000K/6500K	120/150W	563x210x74m m
Cable	37cm H05RN-F 3G*1.0mm	200W	621x233x74m m
Surge	2KV/4KV ,can add 10KV external surge protector		
Material	Aluminum+ PC Lens		
Function	With Integrated Light Sensor		

STRIP RGBW SET



CE FCC CB ENEC RoHS Compliant EMC 2.0 ERP NEW

- 2 warranty
- SMD
- IP20
- 20°C +40°C
- CRI ≥80
- 15000h


RGB SERIES		CLASS SERIES		
Power	12W/m	Power	5W/m	10W/m 15W/m
Voltage	5V/12V/24V	Voltage	12V/24V	
Efficiency	180lm/m	Efficiency	100lm/m	
CCT	RGB+4000K	CCT	3000/4000/6500K	
Size	5000 x 10 x 2mm	Size	5000 x 10 x 1.25/1.45/1.65mm	

PLANT-GROWTH LIGHT

CE FCC CB ENEC RoHS Compliant EMC 2.0 ERP NEW



- 2 warranty
- SMD
- IP65
- 20°C +40°C
- CRI ≥80
- 15000h

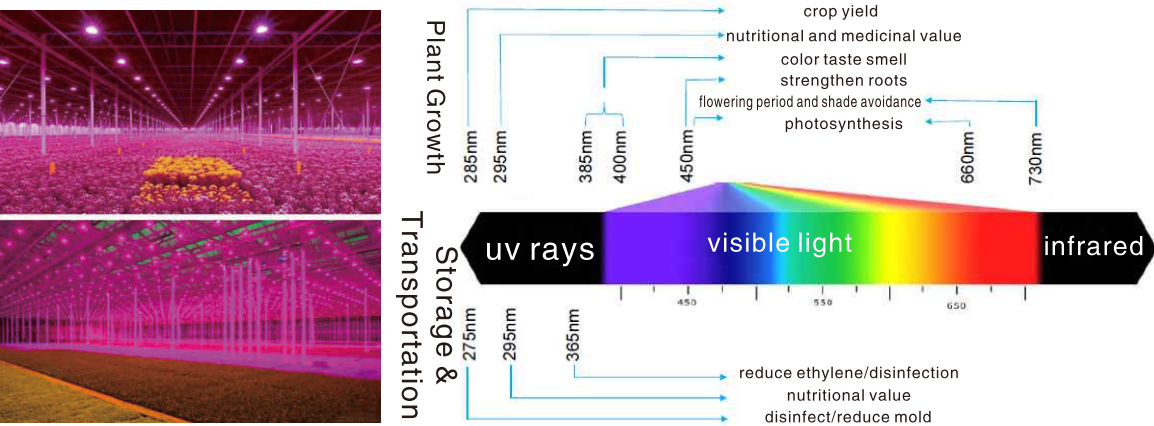

T8 PLANT-GROWTH LIGHT

Power	Voltage	Luminous Flux	Size	QTY	Warranty
9W	220-240V	600lm	0.6mm	25PCS	2years
18W	220-240V	1200lm	1.2mm	25PCS	2years



XFPL SERIES FLOODLIGHT

Power	Voltage	Luminous Flux	QTY	Warranty
35W	220-240V	600lm	20PCS	2years
70W	220-240V	800lm	12PCS	2years